



HGA

CODO 45°

LONG RADIUS

Normas de Diseño:


ANSI/ASME B16.9

Material: Acero Inoxidável ASTM A403

304L y 316L

Cédula:

SCH 10s, SCH 40s, SCH 80s

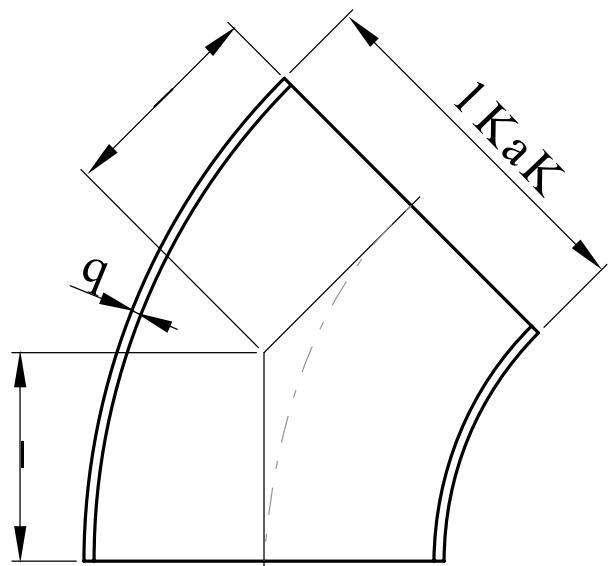

Unidad: Pulgadas (inch)

MEDIDA	DIÁMETRO EXTERIOR (OD)	ESPESOR DE PARED (T)			CENTRO A FINAL (A)	PESO (Kg)		
		SCH 10	SCH 40	SCH 80		SCH 10	SCH 40	SCH 80
1/2"	0.84	0.083	0.109	0.147	0.62	0.039	0.052	0.054
3/4"	1.05	0.083	0.113	0.154	0.44	0.064	0.077	0.054
1"	1.32	0.109	0.133	0.179	0.88	0.103	0.13	0.141
1 1/4"	1.66	0.109	0.14	0.191	1	0.142	0.184	0.227
1 1/2"	1.9	0.109	0.145	0.147	1.12	0.571	1.02	0.286
2"	2.38	0.109	0.154	0.218	2	0.406	0.683	0.513
2 1/2"	2.88	0.12	0.203	0.276	1.75	0.571	1.02	0.993
3"	3.5	0.12	0.216	0.3	2	0.764	1.41	1.501
4"	4.5	0.12	0.237	0.337	2.5	0.985	1.92	3.094
5"	5.56	0.134	0.258	0.375	3.12	1.71	3.42	4.79
6"	6.62	0.134	0.28	0.432	3.75	2.43	5.45	8.165
8"	8.62	0.148	0.322	0.5	5	4.9	10.1	16.556
10"	10.75	0.165	0.365	0.5	6.25	7.8	18	25.855
12"	12.75	0.18	0.375	0.5	7.5	13	28.1	39.69