



* Reference photo

Norm: ASTM A270

Standard: 3A

Material: SS 316L


Ends: Welded

Polish: 320 Grit Inside / Outside

Tolerances: The wall thickness at any point shall not vary more than 12.5 %, from the specified wall thickness.

Speed Logística y Servicios S.A.C.
Importador y distribuidor autorizado de productos HGA
para Perú y para su exportación.

DIMENSIONS

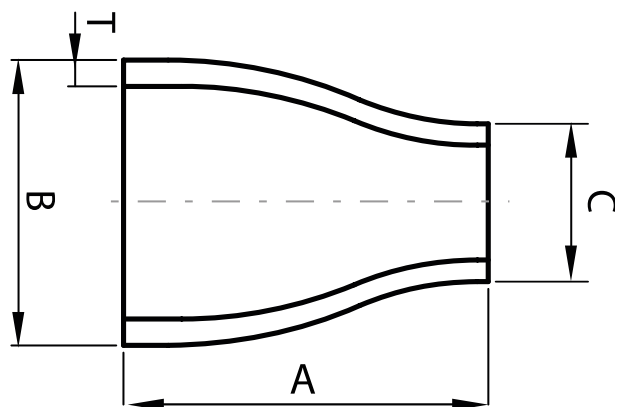

SIZE	A	B	C	T (wall thickness)	WEIGHT
inch	mm	mm	mm	mm	kg
3/4 x 1/2	25.4	0.75	0.50	1.65	-
1 x 1/2	50.8	1.00	0.50	1.65	-
1 x 3/4	25.4	1.00	0.75	1.65	0.23
1 1/2 x 1/2	101.6	1.50	0.50	1.65	-
1 1/2 x 3/4	76.2	1.50	0.75	1.65	-
1 1/2 x 1	50.8	1.50	1.00	1.65	0.05
1 1/2 x 1 1/4	25.4	1.50	1.25	1.65	-
2 x 1	101.6	2.00	1.00	1.65	0.23
2 x 1 1/4	76.2	2.00	1.25	1.65	-
2 x 1 1/2	50.8	2.00	1.50	1.65	0.14
2 1/2 x 1 1/2	101.6	2.500	1.50	1.65	0.14
2 1/2 x 2	50.8	2.500	2.00	1.65	0.09
3 x 1 1/2	152.4	3.00	1.50	1.65	0.36
3 x 2	101.6	3.00	2.00	1.65	0.27
3 x 2 1/2	50.8	3.00	2.50	1.65	0.14
4 x 2	203.2	4.00	2.00	2.11	0.63
4 x 2 1/2	152.4	4.00	2.50	2.11	0.50
4 x 3	101.6	4.00	3.00	2.11	0.27
6 x 2	139.7	6.00	2.00	2.77	-
6 x 3	139.7	6.00	3.00	2.77	0.73
6 x 4	139.7	6.00	4.00	2.77	0.54

* Photos and reference data. We accept no liability for incorrect uses or misinterpretations of this data.

