



* Reference photo

Norm: ASTM A270

Standard: 3A

Material: SS 316L


Ends: Clamp x Welded

Polish: 320 Grit Inside / Outside

Tolerances: The wall thickness at any point shall not vary more than 12.5 %, from the specified wall thickness.

Speed Logística y Servicios S.A.C.
Importador y distribuidor autorizado de productos HGA
para Perú y para su exportación.

DIMENSIONS

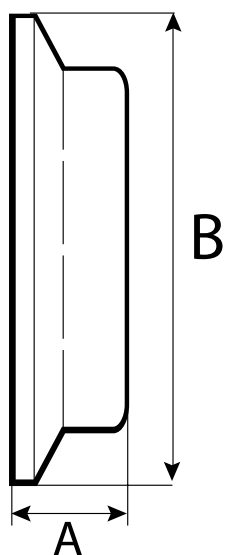

SIZE	A	B	T (wall thickness)	WEIGHT
inch	mm	mm	mm	kg
1/2	12.70	9.40	1.65	0.02
3/4	12.70	15.75	1.65	0.01
1	12.70	22.10	1.65	0.07
1 1/4	12.70	28.45	1.65	0.06
1 1/2	12.70	34.80	1.65	0.04
2	12.70	47.50	1.65	0.06
2 1/2	12.70	60.20	1.65	0.08
3	12.70	72.90	1.65	0.10
4	15.88	97.38	2.11	0.18
6	22.23	146.81	2.77	0.42

* Photos and reference data. We accept no liability for incorrect uses or misinterpretations of this data.

