



* Reference photo

Steel Body Type ASTM A216 WCB.
 Ball: SS 316 (Optional SS 304)
 Seat: RPTFE (Optional Polyfill)
 Memoryseal seating technology
 Two piece body. Full Passage
 Blow-Out-Proof Stem
 Mounting Pad for Actuator ISO 5211
 Operator ON/OFF: Up to 4 inch lever
 From 6 inch tee-type lever or gearbox
 Norm Steel Valves: ANSI/ASME B16.34
 Flange dimensions: ANSI B16.5 RF
 Face to Face dimensions: ASME B16.10
 Maximum Working Pressure:
 740 PSIG @ -29°C to 38°C
 Tests according to API 598
 Not recommend installing the valve
 with the stem pointing downward
 because dirt in the pipeline may then
 enter the body cavity and damage the
 gland packing.



MATERIALS

	PART NAME	MATERIAL
1	BODY	ASTM A216 WCB
2	CAP	ASTM A216 WCB
3	BALL	ASTM A351 Gr. CF8M
4	STEM	ASTM A276 Gr. 304
5	SEAT	RPTFE
6	GASKET	PTFE
7	THRUST WASHER	PTFE
8	PACKING	PTFE
9	GLAND	ASTM A351 Gr. CF8
10	STOPPER	SS304
11	SNAP RING	SS304
12	GLAND BOLT	ASTM A193 Gr. B7
13	STUD BOLT	ASTM A193 Gr. B7
14	SET NUT	ASTM A194 Gr. 2H
15	HANDLE	ASTM A536 Gr. 65-45-12

Speed Logística y Servicios S.A.C.
 Importador y distribuidor autorizado de
 válvulas REX para Perú y para su exportación.


DIMENSIONS (mm)

SIZE	A	E	G	H	L	P	T	WEIGHT (Kg)
2"	165	50	61	123	216	206	127	25.9
2 1/2"	190.5	60	83	170	241	492	149.4	35.9
3"	210	76	89	152	283	392	168	42.9
4"	254	100	116	190	305	492	200	80.0
5"	279.4	127	117.5	267	381	750	235	100
6"	318	148	165	298	403	851	270	137.0
8"	381	200	212	---	502	1006	330	170.0
10"	444.5	254	251	---	568	---	387.3	337.0
12"	521	305	326	---	648	--	451.0	508.0





Position to avoid stem down

PRESSURE TEMPERATURE RATINGS

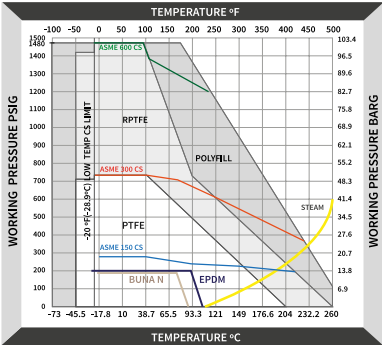

* Note : Dimensions, design and materials are subject to change without notice. Approximate weights.

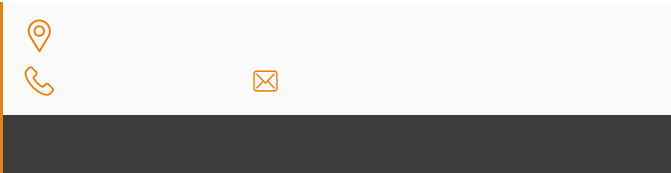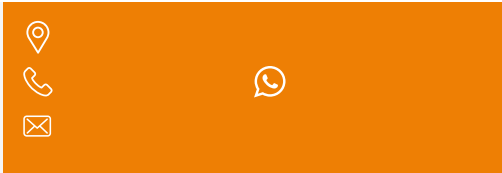

MAC EDITIONS - MMXXIII