

* Reference photo

Steel Body Type ASTM A216 WCB.
 Ball: SS 316 (Optional SS 304)
 Seat: RPTFE (Optional Polyfill)
 Memoryseal seating technology
 Two piece body. Full Passage
 Blow-Out-Proof Stem
 Mounting Pad for Actuator ISO 5211
 Operator ON/OFF: Up to 4 inch lever
 From 6 inch tee-type lever or gearbox
 Norm Steel Valves: ANSI/ASME B16.34
 Flange dimensions: ANSI B16.5 RF
 Face to Face dimensions: ASME B16.10
 Maximum Working Pressure:
 1480 PSIG @ -29°C to 38°C
 Tests according to API 598
 Not recommend installing the valve
 with the stem pointing downward
 because dirt in the pipeline may then
 enter the body cavity and damage the
 gland packing.



MATERIALS

	PART NAME	MATERIAL
1	BODY	ASTM A216 WCB
2	CAP	ASTM A216 WCB
3	BALL	ASTM A351 Gr. CF8M
4	STEM	ASTM A276 Gr. 304
5	SEAT	RPTFE
6	GASKET	PTFE
7	THRUST WASHER	PTFE
8	PACKING	PTFE
9	GLAND	ASTM A351 Gr. CF8
10	STOPPER	SS304
11	SNAP RING	SS304
12	GLAND BOLT	ASTM A193 Gr. B7
13	STUD BOLT	ASTM A193 Gr. B7
14	SET NUT	ASTM A194 Gr. 2H
15	HANDLE	ASTM A536 Gr. 65-45-12

Speed Logística y Servicios S.A.C.
 Importador y distribuidor autorizado de
 válvulas REX para Perú y para su exportación.


DIMENSIONS (mm)

SIZE	A	E	G	H	L	P	T	WEIGHT (Kg)
2"	165	50	75.5	156.0	292	306	165	34.9
2 1/2"	190.5	60	97.6	201.0	330	492	149.4	45.9
3"	210	75	99.0	209.0	355.5	851	168	51.9
4"	273	100	125.0	277.0	432	1006	216	109.0
6"	356	148	172.0	---	559	1006	292	205.0
8"	419	200	212.0	---	661	---	349.2	310.0
10"	510	254	274.0	---	786.8	---	431	556.0
12"	560	305	342.5	--	838.4	---	488.9	803.0


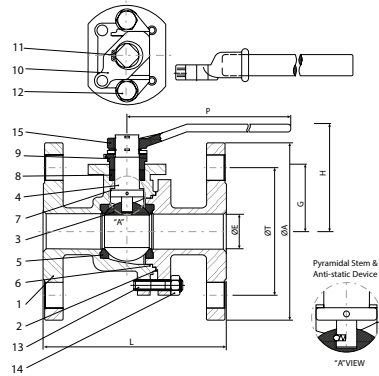


Position to avoid stem down

PRESSURE TEMPERATURE RATINGS

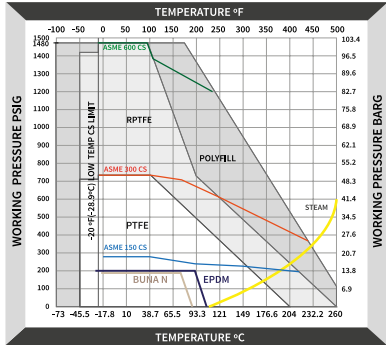

* Note : Dimensions, design and materials are subject to change without notice. Approximate weights.

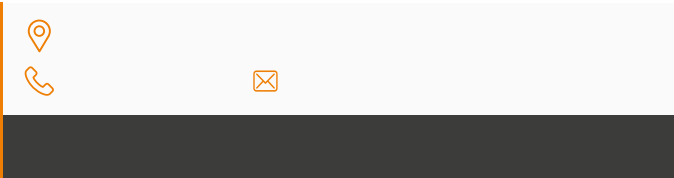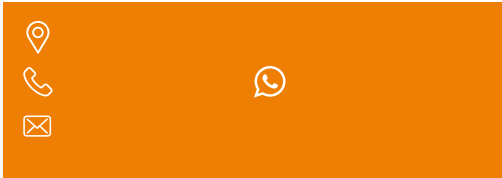

MAC EDITIONS - MMXXIII