



* Reference photo

Body Ductile Iron A536

Specs according to MSS SP-81

Max working pressure: 150 PSIG

Seat elastometric: EPDM

Maximum temperature operation:
EPDM -18°C (0°F) to 110°C (230°F)

Disc SS 316 (optional 304)

Flanges match ASME B16.5 Class 150

Stem up (OS&Y) of 410 stainless steel


Gearbox operation and handwheel

MATERIALS


	PART NAME	MATERIAL
1	BODY	DUCTILE IRON A536
2	SEAT	EPDM
3	ROUND RUBBER	DUCTILE IRON A536
4	STEEL WIRE	A3
5	DISC	316
6	PACKING	GRAPHITE
7	MUD	A3
8	SCREW	A3
9	GLAND	DUCTILE IRON A536
10	NUT	A3
11	SCREW	A3
12	NUT	BRO
13	YOKE	A3
14	STEM	SS 410
15	BEARING	SCHANSB10-6
16	BEARING	SCHANSB10-6
17	HANDWHEEL	DUCTILE IRON A536
18	CAP NUT	A3

DIMENSIONS (mm)

SIZE	A	B	C	D	E	WEIGHT (Kg)
4"	51	203	191	157	394	12.50
6"	57	254	241	216	505	23
8"	70	356	298	270	587	32
10"	70	356	362	324	700	51
12"	76	457	432	381	806	85.50
14"	76	508	478	425	896	88
16"	89	508	540	492	991	135



Gearbox Operation and Handwheel

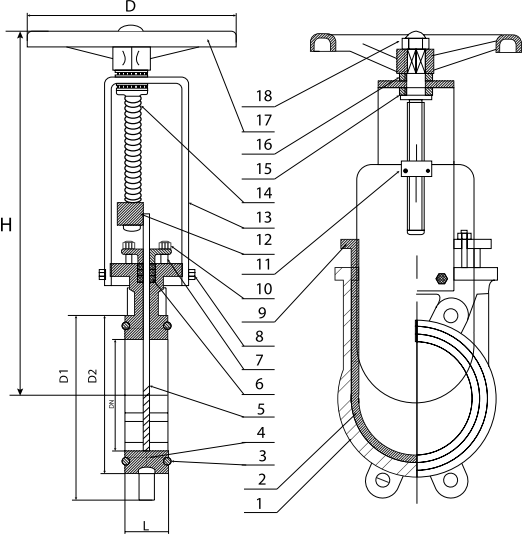

Speed Logística y Servicios S.A.C.
 Importador y distribuidor autorizado de
 válvulas REX para Perú y para su exportación.

* Note : Dimensions, design and materials are subject to change without notice. Approximate weights.

MAC EDITIONS - MMXXIII

