



Includes air connector

\* Reference photo

## DESIGN FEATURES:

### VALVE

Body stainless steel sanitary 304. All wetted parts polished to 180 grit. Seat silicone. Max. Temp.: 120°C. Max. Pressure: 145 PSI. Test standard: API 598


### ACTUATOR

Pneumatic actuator sanitary. Made by stainless steel AISI 304. Working pressure 5 / 7 bar. Max. open working pressure 9 bar. Spring return. Turn angle 90°. Sanitary polished.

For use in water, process liquids and gas, applications in food, medical and pharmaceutical industries or similars.

## VALVE MATERIAL LIST

	PART NAME	MATERIAL
1	BODY	SS304
2	DISC	SS304
3	STEM	SS304
4	SEAT	SILICONE
5	SCREW	SS304
6	SPRING	SS304

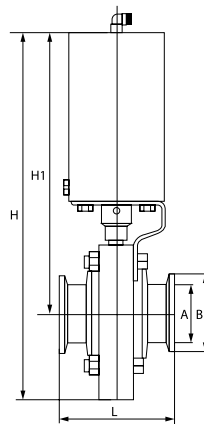

Product ready to be installed.  
We sell the complete product, the valve with the actuator already assembled. We do not sell the actuator separately.

## ACTUATOR MATERIAL LIST

	PART NAME	MATERIAL
1	BODY	SS304
2	STEM	SS304
3	SPRING	SPRING STEEL
4	PISTON	ALLUMINIUM
5	O - RING	NBR
6	CAP RING	SPRING STEEL
7	CAP	SS304

## DIMENSIONS (mm)

SIZE	B	A	L	H1	H	WEIGHT (Kg)
3/4"	50.5	16	66	205	245	4.4
1"	50.5	22	66	205	245	4.3
1 1/4"	50.5	29	66	205	245	4.2
1 1/2"	50.5	35	70	205	245	4.3
2"	64	48	70	215	255	4.6
2 1/2"	77.5	59	76	225	265	5
3"	91	72	80	230	285	5.3
4"	119	98	85	240	295	6.4

Speed Logística y Servicios S.A.C.  
Importador y distribuidor  
autorizado de válvulas SUN en  
territorio latinoamericano.

\* Note : Dimensions, design and materials are subject to change without notice.