



Includes air connector

* Reference photo

DESIGN FEATURES:

VALVE

Body stainless steel sanitary 304. All wetted parts polished to 180 grit. Seat silicone. Max. Temp.: 120°C. Max. Pressure: 145 PSI. Test standard: API 598


ACTUATOR

Pneumatic actuator sanitary. Made by stainless steel AISI 304. Working pressure 5 / 7 bar. Max. open working pressure 9 bar. Spring return. Turn angle 90°. Sanitary polished.

For use in water, process liquids and gas, applications in food, medical and pharmaceutical industries or similars.

VALVE MATERIAL LIST

	PART NAME	MATERIAL
1	BODY	SS304
2	DISC	SS304
3	STEM	SS304
4	SEAT	SILICONE
5	SCREW	SS304
6	SPRING	SS304

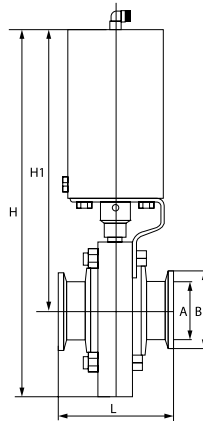

Product ready to be installed.
We sell the complete product, the valve with the actuator already assembled. We do not sell the actuator separately.

ACTUATOR MATERIAL LIST

	PART NAME	MATERIAL
1	BODY	SS304
2	STEM	SS304
3	SPRING	SPRING STEEL
4	PISTON	ALLUMINIUM
5	O - RING	NBR
6	CAP RING	SPRING STEEL
7	CAP	SS304

DIMENSIONS (mm)

SIZE	B	A	L	H1	H	WEIGHT (Kg)
3/4"	50.5	16	66	205	245	4.4
1"	50.5	22	66	205	245	4.3
1 1/4"	50.5	29	66	205	245	4.2
1 1/2"	50.5	35	70	205	245	4.3
2"	64	48	70	215	255	4.6
2 1/2"	77.5	59	76	225	265	5
3"	91	72	80	230	285	5.3
4"	119	98	85	240	295	6.4

Speed Logística y Servicios S.A.C.
Importador y distribuidor
autorizado de válvulas SUN en
territorio latinoamericano.

* Note : Dimensions, design and materials are subject to change without notice.