




* Reference photo

DESIGN FEATURES:


1. Diaphragm valve Sanitary Line.
2. Valve bodies are made of 316 stainless steel
3. Clamp ends according to 3A.
4. Diaphragm PTFE, optional EPDM BLUE (FDA 177.2600 AND USP CLASS VI)
5. Manual operation.
6. Reduced weight and dimensions.
7. Easy cleaning and assembling.
8. Sanitary Polish 320G.
9. Flow direction: Bi-directional.
10. Max. Working pressure 16 bar.
11. Max. Working Temperature 180 °C.

MATERIAL LIST

	PART NAME	MATERIAL
1	Body	SS 316
2	Diaphragm	PTFE
3	Diaphragm guide	SS 304
4	Cap	SS 304
5	Stem	SS 304
6	Handwheel	Technopolymer
7	Nut	SS 304
8	Bolt	SS 304



Optional:
Diaphragm EPDM BLUE

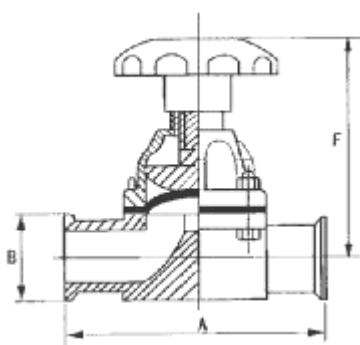

DIMENSIONS (mm)

SIZE	A	B	F	WEIGHT (Kg)
1/2"	100	25.4	100 / 115	0.680
3/4"	100	25.4	100 / 115	0.653
1"	133	50.5	110 / 123	0.950
1 1/4"	-	-	-	-
1 1/2"	163	50.5	120 / 150	2.050
2"	194	64	130 / 156	2.450
2 1/2"	-	-	-	-
3"	-	-	-	-
4"	-	-	-	-

Speed Logística y Servicios S.A.C.
Importador y distribuidor
autorizado de válvulas SUN en
territorio latinoamericano.

* Note : Dimensions, design and materials are subject to change without notice.