

* Reference photo



DESIGN FEATURES:


- Pressure rating: 1000 CWP (non-shock)
- Steam rating: 150 PSI WSP
- Investment cast body & cap
- Blow-out-proof stem adjustable stem
- Adjustable stem packing
- Stainless steel handle with vinyl grip and locking system
- Threaded NPT ANSI/ASME B1.20.1
- Test standard: API 598

MATERIAL LIST


	PART NAME	MATERIAL
1	NUT	316
2	SPRING WASHER	316
3	STEM	ASTM A276 GR. 316
4	HANDLE	STAINLESS STEEL
5	GLAND NUT	316
6	PACKING	PTFE
7	THRUST WASHER	PTFE
8	CAP	ASTM A351 CF8M (316)
9	GASKET	PTFE
10	SEAT	RPTFE
11	BALL	ASTM A351 CF8M (316)
12	BODY	ASTM A351 CF8M (316)

DIMENSIONS (mm)

SIZE	d	H	E	L	WEIGHT (Kg)
1/4"	10.5	50	95	55	0.23
3/8"	12	50	95	55	0.23
1/2"	15	60	95	60.5	0.28
3/4"	20	64	115	70	0.44
1"	25	71	135	81	0.68
1 1/4"	32	78	150	94	1.20
1 1/2"	38	86	160	104	1.52
2"	49	95	180	121	2.10
2 1/2"	62	130	230	148	4.10
3"	76	148	250	162	6.53
4"	96	180	285	200	9.75

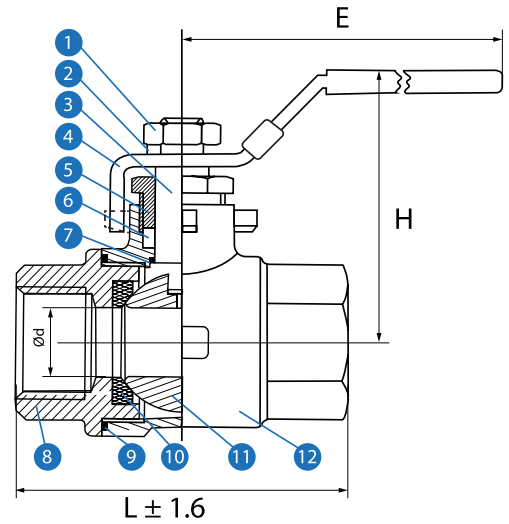

PRESSURE TEMPERATURE RATINGS

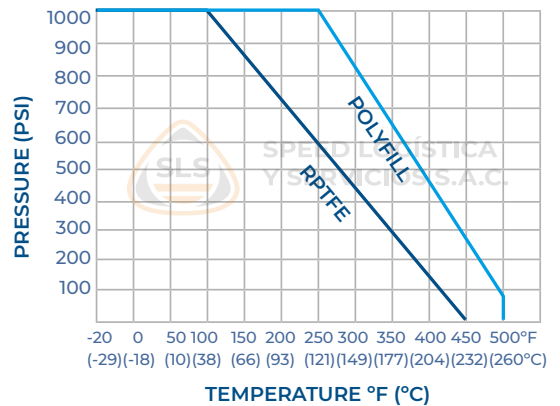

Speed Logística y Servicios S.A.C. Importador y distribuidor autorizado de válvulas SUN en territorio latinoamericano.

* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI