



\* Reference photo


**DESIGN FEATURES:**

Investment casting  
Screwed-in bonnet  
Rising stem  
T handle or handwheel operation  
Connecting threads: NPT ANSI/ASME B1.20.1  
Working pressure: 6000 lb/in<sup>2</sup>  
Female x female (fxf) threaded ends  
Test standard: API 598

**MATERIAL LIST**

	PART NAME	MATERIAL	QTY.
1	SET SCREW	SS304	1
2	HANDLE	SS410	1
3	STEM	SS316	1
4	GLAND NUT	SS304	1
5	GLAND	SS304	1
6	PACKING	TEFLON	1
7	BONNET	ASTM A351 Gr. CF8M	1
8	BODY	ASTM A351 Gr. CF8M	1

Speed Logística y Servicios S.A.C.  
Importador y distribuidor autorizado  
de válvulas SUN en territorio  
latinoamericano.

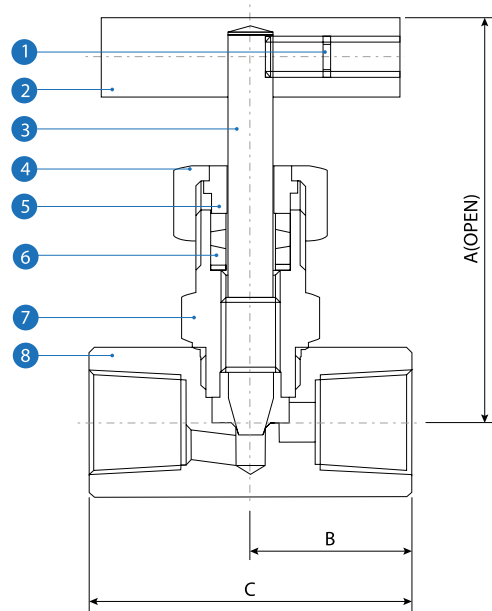

**DIMENSIONS (mm)**

SIZE	L	L1	T	WEIGHT (Kg)
1/8"	75	29.0	58	0.35
1/4"	75	29.0	58	0.35
3/8"	75	29.0	58	0.35
1/2"	87	32.5	65	0.56
3/4"	90	35.0	70	0.70
1"	103	40.0	80	1.30

\* Note : Dimensions, design and materials are subject to change without notice.

MAC - MMXXI

