


cod. 856590



* Reference photo

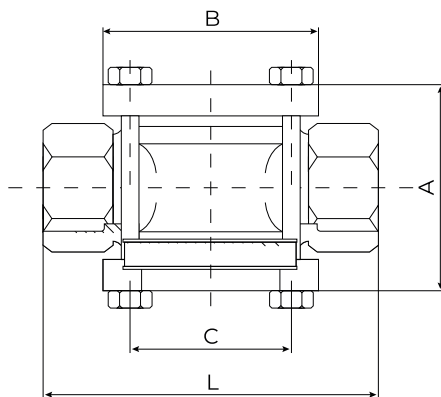

Speed Logística y Servicios S.A.C.
Importador y distribuidor
autorizado de válvulas SUN en
territorio latinoamericano.

Body material SS 316
Ends threaded NPT ASME B1.20.1
Glass: Normal with thermal treatment
"PYREX" Glass
Max Working Pressure 16 bar
Normal Working temperature: 130 °C.
Maximum Temperature (short-term): 160°C


MATERIAL LIST

	PART NAME	MATERIAL
1	Body	SS 316
2	Glass	Tempered Glass
3	Cap	SS 316
4	Joint	PTFE
5	Screw	SS 304

DIMENSIONS (mm)

SIZE	PN	L	A	B	C	GLASS	WEIGHT (Kg)
1/2"	16	95.6	63.9	60.9	41.0	Ø 50 x 8	0.90
3/4"	16	100.2	68.1	64.5	45.0	Ø 50 x 8	1.04
1"	16	120.5	78.7	78.0	54.0	Ø 63 x 10	1.62
1 1/4"	16	139.3	87.2	82.1	58.2	Ø 63 x 10	2.14
1 1/2"	16	145.9	93.7	81.4	59.0	Ø 80 x 12	2.42
2"	16	157.9	113.1	89.4	66.5	Ø 80 x 12	3.34

PRESSURE TEMPERATURE RATING

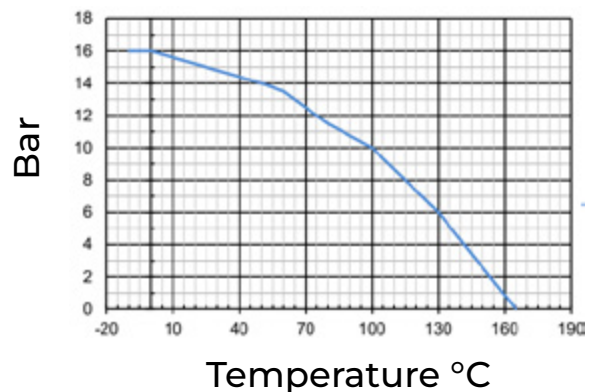

* Note : Dimensions, design and materials are subject to change without notice.

