




* Reference photo

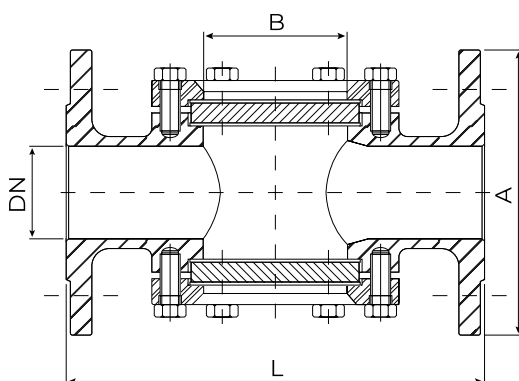

Speed Logística y Servicios S.A.C.
Importador y distribuidor
autorizado de válvulas SUN en
territorio latinoamericano.

Body material SS 316
Flanged ends according to ASME B16.5
Glass: Normal with thermal treatment
"PYREX" Glass
Max Working Pressure 16 bar
Normal Working temperature: 130 °C.
Maximum Temperature (short-term): 160°C


MATERIAL LIST

	PART NAME	MATERIAL
1	Body	SS 316
2	Glass	Tempered Glass
3	Cap	SS 316
4	Joint	PTFE
5	Screw	SS 304

DIMENSIONS (mm)

SIZE	L	A	B	GLASS	WEIGHT (Kg)
1/2"	130	95	40	Ø 50 x 8	2.25
3/4"	150	105	40	Ø 50 x 8	2.80
1"	160	115	50	Ø 63 x 10	3.65
1 1/4"	180	140	50	Ø 63 x 10	5.75
1 1/2"	200	150	65	Ø 80 x 12	8.30
2"	230	165	65	Ø 80 x 12	9.80
2 1/2"	290	185	100	Ø 117 x 15	13.70
3"	310	200	100	Ø 117 x 15	16.65
4"	350	220	125	Ø 145 x 15	23.80

PRESSURE TEMPERATURE RATING

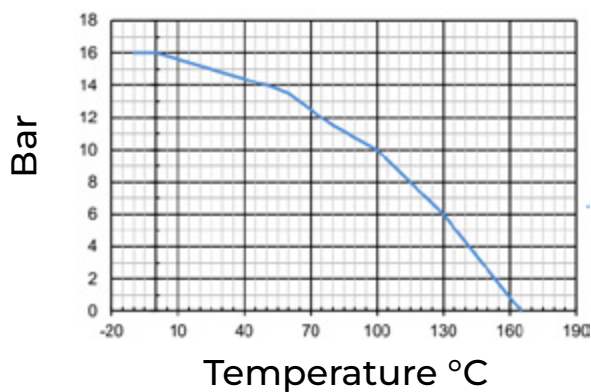

* Note : Dimensions, design and materials are subject to change without notice.