




\* Reference photo

Body and Bonnet Cast Steel A216 WCB  
 Bolted Bonnet  
 Rising Stem OS&Y  
 Norm Steel Valves: ANSI/ASME B16.34  
 Flange dimensions:  
 ANSI/ASME B16.5 RF class 300  
 Face to Face dimensions: ASME B16.10  
 Hydrostatic Testing API 598

**MATERIALS**

|   | PART NAME    | MATERIAL            |
|---|--------------|---------------------|
| 1 | BODY         | CAST STEEL A216 WCB |
| 2 | DISK         | 13% Cr.             |
| 3 | STEM         | SS410               |
| 4 | GLANDPACKING | GRAPHITE-PTFE       |
| 5 | GLAND        | CAST STEEL A216 WCB |
| 6 | BONNET       | CAST STEEL A216 WCB |
| 7 | NUT          | A194-2H             |
| 8 | HANDWHEEL    | IRON                |

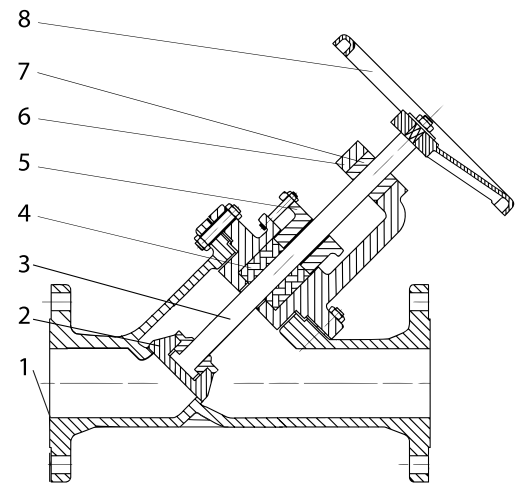

**Speed Logística y Servicios S.A.C.**  
 Importador y distribuidor autorizado de  
 válvulas REX para Perú y para su exportación.

**DIMENSIONS (mm)**


| SIZE   | WEIGHT (Kg) |
|--------|-------------|
| 2"     | 31          |
| 2 1/2" | 38          |
| 3"     | 45          |
| 4"     | 64          |
| 6"     | 120         |

**PRESSURE TEMPERATURE RATINGS (PSI)**

| Temperature °F/°C                               | Class 300 |
|---|-----------|
| (-) 20 °F / (-) 29 °C to (+) 100 °F / (+) 38 °C | 740       |
| 200 °F / 93 °C                                  | 675       |
| 300 °F / 149 °C                                 | 655       |
| 400 °F / 204 °C                                 | 635       |
| 500 °F / 260 °C                                 | 600       |
| 600 °F / 316 °C                                 | 550       |
| 650 °F / 343 °C                                 | 535       |
| 700 °F / 371 °C                                 | 535       |
| 750 °F / 399 °C                                 | 505       |
| 800 °F / 427 °C                                 | 410       |
| 850 °F / 454 °C                                 | 270       |
| 900 °F / 482 °C                                 | 170       |

\* Note : Dimensions, design and materials are subject to change without notice. Approximate weights.

MAC EDITIONS - MMXXIII



SPEED LOGÍSTICA Y SERVICIOS S.A.C.

