

3/8" (10-110N.m) Torque Wrench

★ INTRODUCTION


Cr-Mo



*±3% tolerance


*72Teeth Cr-Mo ratchet drive head

*Aluminum handle



ITEM NO	SIZE	N.m	L mm	PCS	BARCODE
538083	3/8"	10-110N.m	452	16	6959820850781

OPERATION

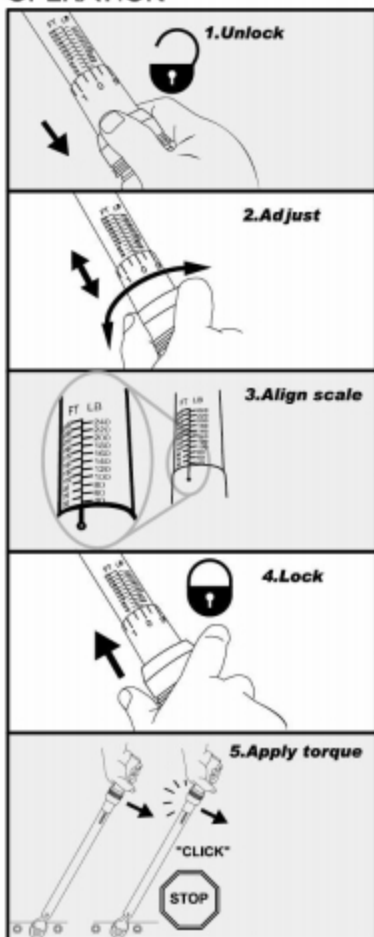

STANDARD

■ We calibrate each torque wrench at the factory using torque standards according to DIN ISO 6789 & ASME B107.14M-1994, and certifies it meets the accuracy requirements of specifications DIN ISO 6789 & ASME B107.14M-1994

CONVERT FROM	TO	MULTIPLY BY
oz-in	in-lb	0.0625
in-lb	in-oz	16
in-lb	kg-cm	1.1519
in-lb	ft-lb	0.083333
in-lb	kg-m	0.011519
in-lb	N-m	0.1130
in-lb	dN-m	1.130
ft-lb	Nm	1.356
ft-lb	kg-m	0.1382
ft-lb	in-lb	12
N-m	dN-m	10
N-m	kg-cm	10.20
N-m	kg-m	0.10197
N-m	in-lb	8.8507
N-m	ft-lb	0.73756
dN-m	in-lb	0.885
dN-m	N-m	0.100
kg-cm	in-lb	0.8681
kg-cm	N-m	0.09807
kg-m	ft-lb	7.236
kg-m	N-m	9.807